

# Contempo Falls

Instructions for Use



---

**A. Fountain Light (1)**



**B. Fountain Light Transformer (1)**



**C. Light Diffuser (1)**



**D. Pump (1)**



May vary from photo above


**E. Wall Anchors(3)**



**F. Wall Bracket (1)**



**G. Rock Tray (1)**

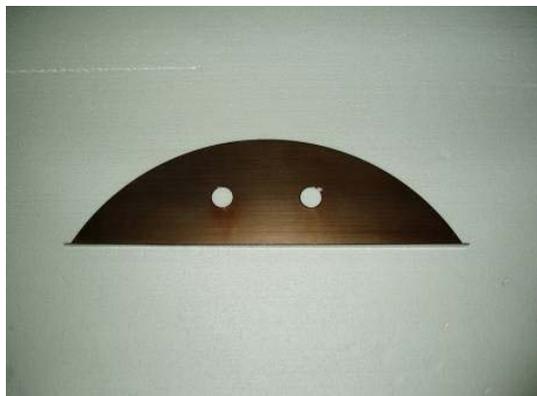

**H. EVA Pads (2)**



## Contempo Falls Assembly:

### Tools Required:

- Level
- Pencil
- Phillips Screwdriver
- Measuring Tape



Decide where you would like to install your fountain.

**\*\* It is critical that your waterfall is level as this will ensure even water flow. \*\***

- a. Because of the relatively light weight nature of your new fountain, it is not necessary to mount it directly into wall studs.
- b. Mount indoors only and in a place that is not in direct sunlight.
- c. We recommend you install your waterfall above an electrical outlet. A Ground Fault Interrupt (GFI) outlet with an internal circuit breaker is preferred.

## Contempo Falls Assembly:

### 1. Marking the Waterfall Location

- a. Locate your Level.
- b. Draw a line on the wall indicating the top of the waterfall. See Fig 1.A. Measure from the line down approximately 11 inches and draw another line to indicate the bottom of the Wall Bracket (F). See Fig 1.B. Using a level, hold the Wall Bracket (F) to the wall with the top angled towards you. Mark both mounting holes on the wall. Remember to double-check your measurements. See Fig 1.C. & 1.D



1.A



1.B



1.C



1.D

## 2. Mounting the Wall Bracket

- a. To install the 3 x EZ Anchors™ (E), gently tap or press the tip into the drywall and slowly screw the anchors into the wall. See Fig 2.A. Make sure the flat side of the anchor is flush with the wall. Do not over-tighten the anchors as this will render them ineffective, as well as damage the drywall. If you encounter a wall stud while installing an EZ Anchor™ (E), use the mounting screw without the anchor. See Fig 2.B. We only suggest using the provided EZ Anchors™ (E) since each EZ Anchor™ (E) has a weight capacity of up to 50 pound. Plastic anchors are not an acceptable substitute.
- b. Install the Mounting Bracket using the 3 x 1” screws provided. Fig 2.C illustrates a correctly installed wall bracket



2.A



2.B



2.C

## 3. Installing and Operating the Waterfall



3.A



3.B


- a. To install the Fountain Light (A), simply clip it to the receiver located on top of the fountain, behind the pipe as shown in Fig 3.C- 3.E. To add a color effect, you may use the Light Diffuser (C). To install the Light Diffuser (C), simply follow the sequence shown in Figures 3.F-3.H



3.C



3.D

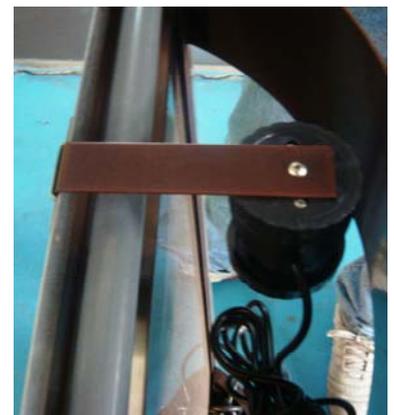

3.E